

**Godox RC-A5II**


注: 此产品仅用于商业用途。

01. 电源开关键    05.+按键  
02.-按键        06.SET按键  
03. 电池仓        07. LCD屏(白底黑字)  
04. CH/GR按钮

**使用说明**

**1. 无线控制**  
RC-A5II具备远程控制功能, 使用433MHz无线, 可以分别控制6个LED摄影灯, 拥有16组传输频道, 抗干扰性强。  
使用前请将LED摄影灯与RC-A5II遥控器频道、组别调整一致。

**机身**

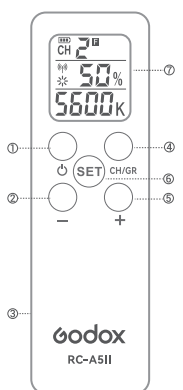

注: 此产品仅用于商业用途。

01. 电源开关键    05.+按键  
02.-按键        06.SET按键  
03. 电池仓        07. LCD屏(白底黑字)  
04. CH/GR按钮

**使用说明**

**1. 无线控制**  
RC-A5II具备远程控制功能, 使用433MHz无线, 可以分别控制6个LED摄影灯, 拥有16组传输频道, 抗干扰性强。  
使用前请将LED摄影灯与RC-A5II遥控器频道、组别调整一致。

**2. 使用遥控器调整频道/组别**

- 按CH/GR按钮, 组别图标闪烁。按“-”或“+”按键选择组别, 可选范围: A-F。
- 按CH/GR按钮两次, 频道图标闪烁。按“-”或“+”按键选择频道, 可选范围: 1-16。

**3. 使用遥控器调节灯光亮度**

- 关机状态下, 按住SET按钮的同时长按电源开关键, LCD屏幕出现“1”或“2”, 短按SET按钮选中1后; 短按电源开关键开机, 短按“-”或“+”按键调节灯光亮度, 调节范围: 10%-100%。
- 遥控器色温值为3300K或色温值为5600K时, 短按“-”或“+”按键调节灯光亮度, 调节范围: 10%-100%。
- 遥控器色温值为3400K-5500K时, 短按“-”或“+”按键调节灯光亮度, 调节范围: 25%-100%。

**4. 使用遥控器调节色温**

- 短按遥控器SET按钮, 色温图标闪烁。按“-”或“+”按键调色温, 调节范围: 3300K-5600K

**兼容神牛LED摄影灯机型:**

- UL150、LED1000D

**规格参数**

型号	RC-A5II
供电	3V(AAA电池*2)(电池电筒购)
无线频率	433MHz
频道	16个
组别	6组(A、B、C、D、E、F)
待机时间	一年以上
工作温度环境	-10°C - 50°C
尺寸	120*38*15mm
净重	30g

设计和规格如有变更, 恕不另行通知。

**产品信息**

产品信息	型号	产品条码
用户信息	姓名	联系电话
	通信地址	
	名称	
	联系电话	
销售商信息	通信地址	
	销售日期	
备注		

注: 此表应由销售商盖章确认。

**合格证**  
QC PASS

**产品保修**

尊敬的用户本保修卡是申请保修服务的重要凭证, 请您配合销售商填写并妥善保管, 请妥善保管!

**不适用保修的情况**

如产品存在下列情况, 本文件项下的保证和服务将不适用: ①产品或部件超过相应保修期; ②错误或不适当使用, 维护或保管导致的故障或损坏; ③不当搬运; 非按产品合理预期用途使用; ④不当插接外接设备; 跌落或外力挤压; 接触或暴露于不当温度、溶剂、酸碱、水浸或潮湿环境; ⑤由非神牛授权机构或人员安装、修理、更改、添加或拆卸造成的故障或损坏; ⑥产品或部件原有识别信息被修改或删除; ⑦无效保修卡; ⑧使用非合法授权、非标准或非公开发行的软件造成的故障或损坏; ⑨因不可抗力或意外事件造成的故障或损坏; ⑩其他非因产品本身质量问题导致的故障或损坏。遇上述情况, 您应向相关责任方寻求解决, 神牛对此不承担任何责任。因非在保修期或保修范围内的部件、附件或软件导致产品不能正常使用的, 不是保修范围内的故障。产品使用过程中正常的颜色、磨损和消耗, 不是保修范围内的故障。

**产品保修和服务支持信息**

产品的保修期和服务类型按以下《产品保修信息》执行:


产品类别	选项名称	保修期(月)	保修服务类型
部件	主机	12	客户送修
	电池	3	客户送修
其他	充电器等常规性能的部分	12	客户送修
	如闪光灯管、造型灯罩、外壳、保护罩、原装袋、真包装等。	无	无保修

神牛产品售后服务电话 0755-29609320-8062

**深圳市神牛摄影器材有限公司**  
地址: 深圳市宝安区福海街道塘尾社区塘川工业区厂房2栋  
电话: 0755-29609320(8062)  
传真: 0755-25273423  
邮箱: godox@godox.com

**GODOX Photo Equipment Co., Ltd.**  
Add.: Building 2, Yaohuan Industrial Zone, Tangwei Community, Fuhai Street, Bao'an District, Shenzhen 518103, China  
Tel: +86-755-29609320(8062)  
Fax: +86-755-25273423  
E-mail: godox@godox.com  
godox.com    Made in China

**Body**

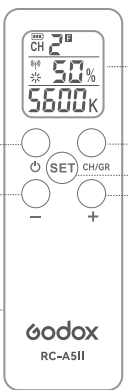

01. Power Switch  
02. - Button  
03. Battery Compartment  
04. CH/GR Button  
05. + Button  
06. SET Button  
07. LCD Panel (Black in White)

**Warning**

Warning  
Operating frequency: 433.05MHz - 434.79MHz  
Maximum ERP Power: -12.22dBm

**Declaration of Conformity**  
GODOX Photo Equipment Co., Ltd. hereby declares that this Remote Control/RC-A5II is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. In accordance with Article 10(2) and Article 10(10), this product is allowed to be used in all EU member states. For more information of DoC, Please click this web link: [https://www.godox.com/DOC/Godox\\_RC-A5\\_DOC.pdf](https://www.godox.com/DOC/Godox_RC-A5_DOC.pdf)

The device complies with RF specifications when the device used at 0mm from your body.

**Operation**

**1. Wireless Control**  
With 433MHz wireless, RC-A5II has control function. Up to 6 groups of LED lights can be controlled. 16 channels are available with strong anti-interference capability.  
Please set the channels and groups of LED light to the same as those of RC-A5II remote control before usage.

**2. Adjusting Channel/Group with the Remote Control**

- Press the CH/GR button and the group icon blinks.
- Press the “-”/“+” button to choose a group (A to F).
- Press the CH/GR button twice and the channel icon blinks.
- Press the “-”/“+” button to choose a channel (1 to 16).

**3. Adjusting Light Brightness with the Remote Control**

• Long press the SET button and power switch at the same time in power off status until the LCD panel displays “1” or “2”, short press the SET button to choose 1, then power on the remote control.

• When the CCT value is 3300K or 5600K, short press the “-”/“+” button to adjust the light brightness from 10% to 100%.

• When the CCT value is between 3400K to 5500K, short press the “-”/“+” button to adjust the light brightness from 25% to 100%.

• Long press the SET button and power switch at the same time in power off status until the LCD panel displays “1” or “2”, short press the SET button to choose 2. Then power on the remote control, short press the “-”/“+” button to adjust the light brightness from 0% to 100%.

**4. Adjusting Color Temperature with the Remote Control**

- Short press the SET button and the color temperature icon blinks. Press the “-”/“+” button to adjust the color temperature from 3300K to 5600K.

**Compatible Godox LED Lights Models**

- UL150 and LED1000D

**Technical Data**

Model	RC-A5II
Power Supply	3V(AAAA*2)(not include)
Wireless Frequency	433MHz
Channel	16
Group	6 (A、B、C、D、E、F)
Standby Time	Over one year
Working Temperature	-10°C - 50°C
Dimension	120*38*15mm
Net Weight	30g

Design and specification are subject to changes without notice.

**FCC Statement**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and  
(2) this device must accept any interference received, including interference that may cause undesired operation.  
Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
-Reorient or relocate the receiving antenna.  
-Increase the separation between the equipment and receiver.  
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
-Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure condition without restriction.

**Warranty**

Dear customers, as this warranty card is an important certificate to apply for our maintenance service, please fill in the following form in coordination with the seller and safe-keep it. Thank you!

Product Information	Model	Product Code Number
Customer Information	Name	Contact Number
Seller Information	Address	
	Name	Contact Number
	Address	
Date of Sale		

Note: This form shall be sealed by the seller.

**Applicable Products**

The document applies to the products listed on the Product Maintenance Information (see below for further information). Other products or accessories (e.g. promotional items, giveaways and additional accessories attached, etc.) are not included in this warranty scope.

**Warranty Period**

The warranty period of products and accessories (implemented according to the relevant Product Maintenance Information). The warranty period is calculated from the day (purchase date) when the product is bought for the first time. And the purchase date is considered as the date registered on the warranty card when buying the product.

**How to Get the Maintenance Service**

If maintenance service is needed, you can directly contact the product distributor or authorized service institutions. You can

also contact the Godox after-sale service call and we will offer you service. When applying for maintenance service, you should provide valid warranty card. If you cannot provide valid warranty card, we may offer you maintenance service once confirmed that the product or accessory is involved in the maintenance scope, but that shall not be considered as our obligation.

**Inapplicable Cases**

The guarantee and service offered by this document are not applicable in the following cases: ① The product or accessory has expired its warranty period; ② Breakage or damage caused by inappropriate usage, maintenance or preservation, such as improper packing, improper usage, improper plugging in/out external equipment, falling off or squeezing by external force, contacting or exposing to the improper temperature, solvent, acid, base, flooding and damp environments, etc.; ③ Breakage or damage caused by non-authorized institution or staff in the process of installation, maintenance, alteration, addition and detachment; ④ The original identifying information of product or accessory is modified, alternated, or removed; ⑤ No valid warranty card; ⑥ Breakage or damage caused by using illegally authorized, nonstandard or non-public released software; ⑦ Breakage or damage caused by force majeure or accident; ⑧ Breakage or damage that could not be attributed to the product itself. Once met these situations above, you should seek solutions from the related responsible parties and Godox assumes no responsibility. The damage caused by parts, accessories and software that beyond the warranty period or scope is not included in our maintenance scope. The normal

discoloration, abrasion and consumption are not the breakage within the maintenance scope.

**Maintenance and Service Support Information**

The warranty period and service types of products are implemented according to the following Product Maintenance Information:

Product Type	Name	Maintenance Period(month)	Warranty Service Type
Other Items	Flash unit, modifing lamp body, lamp cover, etc.	No	Without warranty
	Parts		
	Electrical parts e.g. trigger, etc.	12	Customer sends the designated site
	Circuit Board	3	Customer sends the product to designated site
	Battery	12	Customer sends the designated site

Godox After-sale Service  
Call +86-755-29609320(8062)