


# Godox

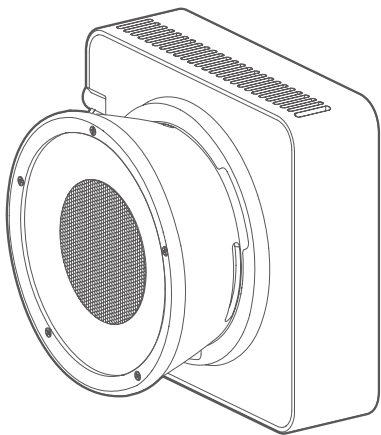

## ML100 Bi

使用手册

Instruction Manual V1.0

V1.00 固件 / Firmware

## 重要的安全说明及注意事项

首先作为最基本原则：本产品为专业灯光布景设备，应由专业灯光师使用或在专业人士指导下使用。使用时必须始终遵循基本的安全预防措施，具体安全预防措施如下：

- 使用前必须阅读并理解产品使用手册。
- 专业灯具，禁止儿童使用。当儿童靠近时，家长或监护人必须密切监督，以免儿童因碰撞灯具或私用灯具造成人身伤害。
- 灯具点亮时，必须小心使用，禁止接触高温部件，如 LED 灯珠，以免造成灼伤。
- 灯具点亮时，任何情况下均禁止直视灯珠。应该在专业灯光师指导下使用强光，任何情况下避免长时间处于强光环境，如引起眼睛不适，请及时关闭灯具，暂停使用，请及时就医。
- 倘若灯珠损坏或因热变形，应停止使用，并及时联系制造商、服务代理商或合格的维修人员更换灯珠，以免发生意外。
- 请勿使用损坏的设备或设备配件，待专业维修人员检查维修，确认设备正常方可使用。
- 在使用过程中，如果本产品由于跌落、受到挤压或遭受强烈冲击而造成外壳破裂的，请勿继续使用，以免因接触到内部电子元件而受到电击伤害。
- 本设备没有防水性能，请让设备保持干燥，请勿将本设备浸入水中或其他液体中。设备需安装在干燥且通风处，避免在雨天、潮湿、多尘或过热环境下使用。请勿将任何物体置于灯具上或使液体流入灯具内部，以免发生意外。
- 安全说明依据本厂严格测试制定，设备设计和规格如有变更，恕不另行通知。客户可以上神牛官网查看最新的电子版说明，了解产品最新资讯。



请勿直视光源

本设备包含型号核准代码为：CMIIT ID: 24J44V807298，为该产品的无线电发射模块。


## 前言

感谢您购买神牛产品。


神牛全新推出便携 LED 摄影灯 ML100Bi，其机身方正而薄，底部设有 1/4" 螺纹孔，可兼容市面上绝大多数三脚架。此外，ML100Bi 支持“Godox light”应用程序无线控制；具备两种模式：双色温模式和 11 类 FX 场景光效模式；适用于户外直播、室内直播、视频拍摄等场景。

## 物品清单

### ML100Bi L



灯体 × 1



透镜反光杯 ML-L15 × 1



支架 AD-E2 × 1




使用手册 × 1


## ML100Bi (标配)




灯体 × 1




灯头保护罩 × 1



透镜反光杯 ML-L15 × 1



支架 AD-E2 × 1



适配器 × 1




AC 电源线 × 1




使用手册 × 1


## ML100Bi (With Carry Bag)



灯体 × 1




灯头保护罩 × 1



透镜反光杯 ML-L15 × 1



支架 AD-E2 × 1



适配器 × 1



AC 电源线 × 1




收纳包 × 1




使用手册 × 1


## ML100Bi Kit1




灯体 × 1




灯头保护罩 × 1



透镜反光杯 ML-L15 × 1



支架 AD-E2 × 1




适配器 × 1



AC 电源线 × 1



透镜反光杯 ML-L36 × 1



固定支架 PH01 × 1



迷你三脚架 MT01 × 1




收纳包 × 1




使用手册 × 1


## ML100Bi Kit2



灯体 × 1




镜头保护罩 × 1



透镜反光杯 ML-L15 × 1




支架 AD-E2 × 1




适配器 × 1



AC 电源线 × 1



透镜反光杯 ML-L36 × 1



V 口电池附件套装 AK-B02 × 1




收纳包 × 1




使用手册 × 1

## ML100Bi Kit3



灯体 × 3




灯头保护罩 × 3



透镜反光杯 ML-L15 × 1




支架 AD-E2 × 3



适配器 × 3




AC 电源线 × 3



透镜反光杯 ML-L36 × 1




60cm 柔光箱  
AD-S60S × 1



30cm 柔光球  
ML-CS30 × 1



灯架 BS-3R-FE-190 × 3



收纳包 × 1



使用手册 × 1

注:





1. 开箱后核对所购套装内的物品, 若有缺失或破损, 及时联系经销商。
2. 图示仅供参考, 具体以实际产品为准。

## 另购附件

八角柔光箱 ML-SF50、球形灯笼柔光箱 ML-CS30、透镜反光杯 ML-L36、  
透镜反光杯 ML-L15、固定支架 PH01、神牛转保荣卡口转接环 ML-GB。

## 部件名称

1. 显示屏
2. 电源 / MENU 按键
3. MODE 按键
4. 调节拨轮
5. 散热孔
6. 卡口释放键
7. 神牛卡口
8. COB 灯珠
9. DC 输入接口
10. USB-C 输入接口
11. 1/4" 螺纹孔

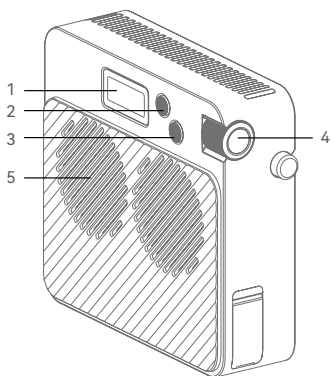

## 透镜反光杯使用

**安装:** 对准卡口插入, 顺时针旋转锁定。

**拆卸:** 按住卡口释放键, 逆时针旋转取下。

注: 灯头保护罩操作步骤相同, 点亮灯珠前, 务必拆卸保护罩。

## 供电方式

**DC 输入接口:** 适配器接入交流电后与灯体 DC 输入接口连接。

**USB-C 输入接口:** 另购 18W 以上的充电头或充电宝进行供电, 具体输出亮度将根据使用的充电头或充电宝的功率值来调整。

注: ML100Bi L 套装不含适配器, 需另购。

## 开机 / 关机

接通电源后, 长按电源键开机, 再次长按关机; 菜单开启快速开机功能, 无需按键即可开机。

## CCT 模式

短按 MODE 按键切换 CCT 设置界面, 短按并滚动调节拨轮设置参数值, 向上滚动递增参数值, 向下滚动递减参数值。

亮度范围: 0% ~ 100%

色温范围: 2800K ~ 6500K



## FX 模式

短按 MODE 按键切换 FX 设置界面, 滚动调节拨轮可选 11 类光效, 选中某一光效后短按调节拨轮进入具体设置。

### 闪光灯



光效	亮度	色温	速度	其他
闪光灯	0% -100%	2800K-6500K	1-100	模式: 闪光灯 / 镁光灯 触发: 自动 / 手动
雷闪电		2800K-6500K	/	闪烁次数: 随机 / 1-10 频率: 随机 / 2-20 触发: 自动 / 手动
多云		/	随机 / 1-100	亮暗比例: 30%-90%
坏灯泡		2800K-6500K	1-100	/
电视机		/	1-100	/
蜡烛		/	1-100	/
火		/	1-100	/
烟花		/	1-100	余烬: 1-100
爆炸		2800K-6500K	1-100	余烬: 1-100 触发: 自动 / 手动
焊接		2800K-6500K	1-100	/
SOS		2800K-6500K	/	/

注: 所有光效均可设置开启或关闭; 触发方式设为手动时, 短按调节拨轮可触发一次光效。

## 菜单设置

短按 MENU 按键进入菜单设置，滚动调节拨轮进行选择，选定后短按调节拨轮进入该项的具体设置。



### 蓝牙

短按调节拨轮进入蓝牙，通过短按并滚动调节拨轮设置开 / 关；滚动调节拨轮到重置栏，选择确定可重置蓝牙；下方查看蓝牙 MAC 码，便于灯具查找。




### 风扇

短按调节拨轮进入风扇，通过滚动调节拨轮可选静音 / 自动 / 中速 / 高速，选定后短按调节拨轮完成设置。



### 屏幕设置

短按调节拨轮进入屏幕设置，通过滚动调节拨轮设置 10%-100% 屏幕亮度。



## 语言

短按调节拨轮进入语言，通过滚动调节拨轮可选简体中文 / English，选定后短按调节拨轮完成设置。

语言

简体中文

English

## 快速开机

短按调节拨轮进入快速开机，通过滚动调节拨轮可选关闭或开启，选定后短按调节拨轮完成设置；开启后，无需按键操作，接入电源即开机。

快速开机

关  
开

## 恢复出厂设置

短按调节拨轮进入恢复出厂设置，通过滚动调节拨轮可选确定 / 取消；短按调节拨轮确定恢复出厂，灯具自动重启，设置需要的语言后灯体亮度值自动变为 100%

恢复出厂设置

确定

取消

## 灯具信息

短按调节拨轮进入灯具信息，此界面可查看当前设备基础信息。

## “Godox Light” 应用程序连接指南

扫描二维码，或在应用商店搜索  
“Godox Light” 下载安装。

**蓝牙重置:** 进入菜单 > 蓝牙 > 确认重置。

**蓝牙配对:** 打开应用程序，选择“蓝牙添加”，  
搜索并连接设备。

**固件升级:** 在应用程序设备列表中点击 [⋮]  
选择固件升级，将自动检测新版本，请按提示  
操作。



## 照度数据

色温	测试条件	照度单位	1m	2m	3m
2800K	裸灯	lux	3110	761	361
		fc	289	71	34
	带透镜反光杯 ML-L15	lux	26100	3740	3010
		fc	2420	347	279
	带透镜反光杯 ML-L36	lux	13700	3430	1460
		fc	1270	319	136
3200K	裸灯	lux	3380	828	392
		fc	314	77	36
	带透镜反光杯 ML-L15	lux	28400	4090	3280
		fc	2640	380	304
	带透镜反光杯 ML-L36	lux	14900	3720	1600
		fc	1390	346	148
4300K	裸灯	lux	3760	922	436
		fc	350	86	41
	带透镜反光杯 ML-L15	lux	31700	4580	3650
		fc	2950	426	339
	带透镜反光杯 ML-L36	lux	16600	4150	1780
		fc	1550	385	166
5600K	裸灯	lux	3940	963	458
		fc	366	90	43
	带透镜反光杯 ML-L15	lux	33200	4810	3820
		fc	3090	447	355
	带透镜反光杯 ML-L36	lux	17400	4350	1860
		fc	1620	404	173
6500K	裸灯	lux	3840	936	445
		fc	357	87	41
	带透镜反光杯 ML-L15	lux	32300	4700	3710
		fc	3000	437	345
	带透镜反光杯 ML-L36	lux	16900	4230	1810
		fc	1570	393	168

注:

1. 上述透镜反光杯为部分套装内的物品, 如有需要也可单独另购。
2. 以上数据均为平均值, 非绝对值, 以上测试皆在灯体 100%亮度下进行。

## 技术参数

型号	ML100Bi
DC 输入接口	20V $\overline{=}$ 6A
	输入功率 $\approx$ 110W
色温	2800K - 6500K
调光范围	0% - 100%
FX 光效	11 类
CRI	$\approx$ 96
TLCI	$\approx$ 97
控制方式	应用程序 / 灯体控制
蓝牙控制距离	最远 30 米
工作环境温度	-10°C ~ 40°C
尺寸 (不含透镜反光杯)	122 × 46 × 110mm
净重 (不含透镜反光杯)	$\approx$ 530g

注：产品设计与规格如有变更，恕不另行通知。

## Important Safety Instructions and Precautions

**First of all, as the most basic principle: This product is a professional lighting set equipment and should be used by professional lighting engineers or under the guidance of professionals. Basic safety attentions must always be followed during use, as follows:**

- Before use, please read and understand the instruction manual.
- Professional lighting is prohibited for children. When children are near, parents or accompanying persons must supervise closely to prevent children from personal injury due to collision with lamps or private use of lamps.
- When the lamp is on, it must be used with care. Do not touch high-temperature parts, such as LED lamp beads, to avoid burns.
- When the light is on, it is forbidden to look directly at the lamp beads under any circumstances. Strong light should be used under the guidance of professional lighting engineers. Avoid prolonged exposure to strong light under any circumstances. If it causes eye discomfort, turn off the light, suspend use and seek medical attention promptly.
- If the lamp bead is damaged or deformed by heat, stop using this equipment, and contact the manufacturer, service agent or qualified maintenance personnel to replace the lamp bead in time to avoid accidents.
- Do not use damaged equipment or accessories, and wait for professional maintenance personnel to check and repair to confirm being normal before use.
- During using, if the casing of this product is broken due to being dropped, squeezed or subjected to strong impact, please do not use it, so as to avoid electric shock injury due to contact with internal electronic components.
- This equipment is not waterproof, please keep it dry and do not immerse it in water or other liquids. The equipment should be installed in a dry and ventilated place, and avoid using it in rainy, humid, dusty or overheated environments. Do not place any objects on the lamp or let liquid flow into the lamp to avoid accidents.
- The safety instructions are formulated according to the strict testing of the factory, and the design and specifications of the equipment are subject to change without prior notice. For latest product information, please check the GODOX website and view latest electronic instruction.



Do not stare at the operating light source.


## Foreword

Thank you for purchasing a Godox product.


Godox introduces the new portable LED video light ML100Bi. It features a square and slim body with a 1/4" Threaded hole at the bottom, making it compatible with most tripods available in the market. In addition, the ML100Bi supports wireless control through the "Godox light" App, offering two modes: bi-color temperature mode and 11 types of FX modes. This product is suitable for outdoor livestreaming, indoor livestreaming, video shooting, and other scenarios.

## What's Inside

### ML100Bi L



Light Body × 1



Lens Reflector ML-L15 × 1




Holder AD-E2 × 1




Instruction Manual × 1


## ML100Bi (Standard)



Light Body × 1




Protective Cover × 1



Lens Reflector ML-L15 × 1



Holder AD-E2 × 1



Adapter × 1



AC Power Cord × 1




Instruction Manual × 1


## ML100Bi (With Carry Bag)



Light Body × 1




Protective Cover × 1



Lens Reflector ML-L15 × 1



Holder AD-E2 × 1



Adapter × 1



AC Power Cord × 1




Storage Bag × 1




Instruction Manual × 1

## ML100Bi Kit1



Light Body × 1




Protective Cover × 1



Lens Reflector ML-L15 × 1



Holder AD-E2 × 1




Adapter × 1




AC Power Cord × 1



Lens Reflector ML-L36 × 1



Fixing Holder  
PH01 × 1



Mini Tripod MT01 × 1




Storage Bag × 1




Instruction Manual × 1

## ML100Bi Kit2



Light Body × 1




Protective Cover × 1



Lens Reflector ML-L15 × 1




Holder AD-E2 × 1




Adapter × 1



AC Power Cord × 1



Lens Reflector ML-L36 × 1



V-mount Battery  
Accessory Kit AK-B02 × 1




Storage Bag × 1




Instruction Manual × 1

## ML100Bi Kit3



Light Body × 3




Protective Cover × 3



Lens Reflector ML-L15 × 1



Holder AD-E2 × 3



Adapter × 3




AC Power Cord × 3



Lens Reflector ML-L36 × 1




60cm Softbox  
AD-S60S × 1



30cm Diffusion  
Dome ML-CS30 × 1



Light Stand  
BS-3R-FE-190 × 3



Storage Bag × 1



Instruction Manual × 1

**Note:**





1. Check the package contents after unboxing. If any items are missing or damaged, contact the dealer immediately.
2. Illustrations are for reference only and may differ from the actual product.

## Separately Sold Accessories

Octagon Softbox ML-SF50, Collapsible Lantern Softbox ML-CS30, Lens Reflector ML-L36, Lens Reflector ML-L15, Fixing Holder PH01, Godox to Bowens Mount Adapter Ring ML-GB.

## Names of Parts

1. Display
2. Power Switch / MENU button
3. MODE Button
4. Select Dial
5. Air Vents
6. Mount Release Button
7. Godox Mount
8. LED COB
9. DC Input Port
10. USB-C Input Port
11. 1/4" Threaded Hole

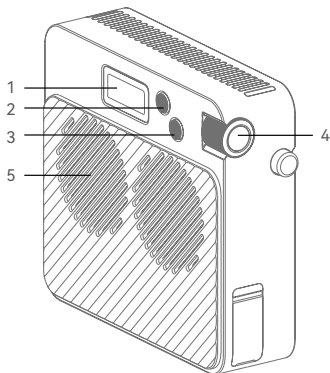

## Lens Reflector Usage

**Install:** Align the reflector with the mount, insert it, and turn clockwise until it locks into place.

**Remove:** Press and hold the Mount Release Button, and turn the reflector counter-clockwise to remove it.

**Note:** The operation for the protection cover is the same. Be sure to remove the protection cover before turning on the light.

## Power Supplies

**DC Input Power Supply:** Connect the adapter to AC power source, then insert into the DC input port on the light body.

**USB-C Input Power Supply:** You can separately purchase a charging adapter or power bank above 18W, the output of which is determined by the charging adapter or power bank used.

**Note:** The adapter is sold separately for ML100Bi L.

## Power Switch

Connect the power supply. Press and hold the Power Button to turn on or off. Enable "Quick Power On" in the menu to turn on automatically without pressing the button.

## CCT Mode

Press the MODE button to switch to CCT mode, in which you can adjust the DIM and CCT.

DIM range: 0% - 100%

CCT range: 2800K ~ 6500K



## FX Mode

Press the MODE button to switch to CCT mode, in which you can choose among the following 11 effects and adjust their respective parameters.




Effect	DIM	CCT	Speed	Others
Flash	0%-100%	2800K-6500K	1-100	Mode: Camera Flash / Flash Bulb Trigger: Auto / Manual
Lightning		2800K-6500K	/	Times: Random / 1-10 Frequency: Random / 2-20 Trigger: Auto / Manual
Cloudy		/	Random / 1-100	Ratio: 30%-90%
Broken Bulb		2800K-6500K	1-100	/
TV		/	1-100	/
Candle		/	1-100	/
Fire		/	1-100	/
Firework		/	1-100	Ember: 1-100
Explosion		2800K-6500K	1-100	Ember: 1-100 Trigger: Auto / Manual
Welding		2800K-6500K	1-100	/
SOS		2800K-6500K	/	/

**Note:** All lighting effects can be turned On or Off. In "Manual" trigger mode, press the Select Dial to trigger the effect once.


## MENU Settings

Press the MENU button to enter menu interface, rotate and press the select dial to enter the following setting options.



## Bluetooth

Press the Select Dial to enter Bluetooth settings. Press and turn the Select Dial to switch Bluetooth On or Off. Select "Reset" and choose "Confirm" to reset the connection. View the MAC Code below for device identification.




## Fan

Press the select dial to enter fan interface, rotate and press the select dial to choose among off, auto, medium and high.




## Display

Press the select dial to enter display interface, rotate and press the select dial to adjust the display brightness from 10% to 100%.




## Language

Press the select dial to enter language interface, rotate and press the select dial to choose between simplified Chinese and English.




## Quick Boot

Press the select dial to enter quick boot interface, rotate and press the select dial to choose between off and on. Turn on the quick boot function, it will automatically be turned on after connected to power source.



## Factory Reset

Press the select dial to enter factory reset interface to choose yes or no. If you choose yes, the device will automatically reset and reboot, after which the brightness will turn to 100% automatically.



## Fixture Info


Press the select dial to enter fixture info interface to check the product basic information.

## "Godox Light" App Connection Guide

Scan the QR code or search for "Godox Light" in the App Store to download.

**Bluetooth Reset:** Go to Menu > Bluetooth > Reset (and confirm).

**Bluetooth Pairing:** Open the App, select "Add Bluetooth", then search for and connect the device.

**Firmware Upgrade:** In the App device list, tap the [  ] and select "Firmware Upgrade". The App will automatically check for new versions. Follow the on-screen instructions.



## Illuminance Data

CCT	Test Condition	Unit	1m	2m	3m
2800K	Bare Light	lux	3110	761	361
		fc	289	71	34
	With Lens Reflector ML-L15	lux	26100	3740	3010
		fc	2420	347	279
	With Lens Reflector ML-L36	lux	13700	3430	1460
		fc	1270	319	136
3200K	Bare Light	lux	3380	828	392
		fc	314	77	36
	With Lens Reflector ML-L15	lux	28400	4090	3280
		fc	2640	380	304
	With Lens Reflector ML-L36	lux	14900	3720	1600
		fc	1390	346	148
4300K	Bare Light	lux	3760	922	436
		fc	350	86	41
	With Lens Reflector ML-L15	lux	31700	4580	3650
		fc	2950	426	339
	With Lens Reflector ML-L36	lux	16600	4150	1780
		fc	1550	385	166
5600K	Bare Light	lux	3940	963	458
		fc	366	90	43
	With Lens Reflector ML-L15	lux	33200	4810	3820
		fc	3090	447	355
	With Lens Reflector ML-L36	lux	17400	4350	1860
		fc	1620	404	173
6500K	Bare Light	lux	3840	936	445
		fc	357	87	41
	With Lens Reflector ML-L15	lux	32300	4700	3710
		fc	3000	437	345
	With Lens Reflector ML-L36	lux	16900	4230	1810
		fc	1570	393	168

### Note:

1. The above lens reflectors are standard accessories only in certain kits, users can purchase them separately if needed.
2. All the data are average values instead of absolute values. All the above tests are based on the condition of 100% brightness.

## Technical Data

Model	ML100Bi
DC Input Port	20V $\equiv$ 6A
	Input Power $\approx$ 110W
CCT	2800K - 6500K
Brightness Range	0% - 100%
FX Modes	11
CRI	$\approx$ 96
TLCI	$\approx$ 97
Controlling Methods	App / light body control
Bluetooth Controlling Distance	Max. 30m
Working Environment Temperature	-10°C ~ 40°C
Dimension (excluding lens reflector)	4.8" $\times$ 1.81" $\times$ 4.33"
Net Weight (excluding lens reflector)	$\approx$ 530g

**Note:** Product design and specifications are subject to change without notice.

## **FCC Statement**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.

## IC Warning

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement. Tout changement ou modification non expressément approuvé par la partie responsable de la réglementation de l'OCDE peut faire perdre à l'utilisateur le droit d'utiliser l'appareil.

Remarque: cet appareil a été testé pour répondre aux limites des appareils numériques de classe B conformément à la partie 15 des règles de la Federal Communications Commission des États - Unis. Ces limites sont conçues pour fournir une protection raisonnable contre les interférences nuisibles dans les installations résidentielles. L'appareil génère de l'énergie RF utilisée et rayonne, ce qui peut causer des interférences nocives pour les communications radio s'il n'est pas installé et utilisé conformément aux instructions. Cependant, aucune garantie contre les interférences dans une installation spécifique. Si l'appareil cause des interférences nuisibles à la réception de la radio ou de la télévision, qui peuvent être déterminées en éteignant et en allumant l'appareil, l'utilisateur est encouragé à tenter de corriger les interférences par une ou plusieurs des mesures suivantes:

- redirection ou repositionnement de l'antenne de réception.
- augmenter l'espacement entre l'appareil et le récepteur.
- Connecter l'appareil à une prise sur un circuit différent de celui auquel le récepteur est connecté.
- consultez votre revendeur ou un technicien radio / tv expérimenté pour obtenir de l'aide.

Avertissement RF pour les appareils portables:

L'appareil a été évalué pour répondre aux exigences générales d'exposition aux radiofréquences. Équipement Peut être utilisé sans restriction dans des conditions d'exposition portables.

## **Warning**

Operating frequency: 2402MHz – 2480MHz (BT)

Maximum EIRP Power: 5dBm (BT)

## **Declaration of Conformity**

GODOX Photo Equipment Co., Ltd. hereby declares that this equipment are in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. In accordance with Article 10(2) and Article 10(10), this product is allowed to be used in all EU member states. For more information of DoC, Please click this web link:

**<https://www.godox.com/eu-declaration-of-conformity/>**

The device complies with RF specifications when the device used at 0mm from your body.

## 产品保修

尊敬的用户, 本保修卡是申请保修服务的重要凭证, 请您配合销售商填写并妥善保管, 谢谢!

产品信息	型号	产品条形码
用户信息	姓名	联系电话
	通信地址	
销售商信息	名称	
	联系电话	
	通信地址	
	销售日期	
备注		

注: 此表应由销售商盖章确认。

## 产品信息

本文件适用于相关《产品保修信息》(见后面说明)所列产品, 其他非属此范围的产品或部件(如促销品、赠品及其他出厂后附加的部件等)不在此保修承诺内。

## 保修期

产品及部件的相应保修期按相关的《产品保修信息》执行。保修期自产品首次购买日起算, 购买日以购买产品时保修卡登记日期为准。

## 如何获得保修服务

您可直接与产品销售商或授权服务机构联系, 也可拨打神牛产品售后服务电话, 与我们联系, 由我们的服务人员为您安排服务。申请保修时, 您应提供有效的保修卡作为保修凭证, 方可获得保修。如您不能提供有效的保修卡, 则在我们确认产品或部件属于保修范围的情况下, 也可以为您提供保修, 但这不作为我们的义务。

## 不适用保修情况

如产品存在下列情况, 本文件项下的保证和服务将不适用: ①产品或部件超过相应保修期; ②错误或不当使用、维护或保管导致的故障或损坏, 如: 不当搬运; 非按产品合理预期用途使用; 不当插拔外接设备; 跌落或外力挤压; 接触或暴露于不当温度、溶剂、酸碱、水浸或潮湿环境; ③由非神牛授权机构或人员安装、修理、更改、添加或拆卸造成的故障或损坏; ④产品或部件原有识别信息被修改变更或删除; ⑤无有效保修卡; ⑥使用非合法授权、非标准或非公开发行的软件造成的故障或损坏; ⑦因不可抗力或意外事件造成的故障或损坏; ⑧其他非因产品本身质量问题导致的故障或损坏。遇上述情况, 您应向相关责任方寻求解决, 神牛对此不承担任何责任。因非在保修期或保修范围内的部件、附件或软件导致产品不能正常使用的, 不是保修范围内的故障。产品使用过程中正常的脱色, 磨损和消耗, 不是保修范围内的故障。

## 产品保修和服务支持信息

产品的保修期和服务类型按以下《产品保修信息》执行:

部件	保修期(月)	保修服务类型
内部电路板	12	客户送修
其他(例如光效附件、各类线材或其他包装)	无	无保修

神牛产品售后服务电话 0755-29609320-8062

## Warranty

Dear customers, as this warranty card is an important certificate to apply for our maintenance service, please fill in the following form in coordination with the seller and safe-keep it. Thank you!

Product Information	Model	Product Code Number
Customer Information	Name	Contact Number
	Address	
Seller Information	Name	
	Contact Number	
	Address	
	Date of Sale	
Note		

Note: This form shall be sealed by the seller.

## Applicable Products

The document applies to the products listed on the Product Maintenance Information (see below for further information). Other products or accessories (e.g. promotional items, giveaways and additional accessories attached, etc.) are not included in this warranty scope.

## Warranty Period

The warranty period of products and accessories is implemented according to the relevant Product Maintenance Information. The warranty period is calculated from the day (purchase date) when the product is bought for the first time, and the purchase date is considered as the date registered on the warranty card when buying the product.

## How to Get the Maintenance Service

If maintenance service is needed, you can directly contact the product distributor or authorized service institutions. You can also contact the Godox after-sale service call and we will offer you service. When applying for maintenance service, you should provide valid warranty card. If you cannot provide valid warranty card, we may offer you maintenance service once confirmed that the product or accessory is involved in the maintenance scope, but that shall not be considered as our obligation.

## Inapplicable Cases

The guarantee and service offered by this document are not applicable in the following cases:

① **The product or accessory has expired its warranty period;** ② **Breakage or damage caused by inappropriate usage, maintenance or preservation, such as improper packing, improper usage, improper plugging in/out external equipment, falling off or squeezing by external force, contacting or exposing to the improper temperature, solvent, acid, base, flooding and damp environments, etc;** ③ **Breakage or damage caused by non-authorized institution or staff in the process of installation, maintenance, alternation, addition and detachment;** ④ **The original identifying information of product or accessory is modified, alternated, or removed;** ⑤ **No valid warranty card;** ⑥ **Breakage or damage caused by using illegally authorized, nonstandard or non-public released software;** ⑦ **Breakage or damage caused by force majeure or accident;** ⑧ **Breakage or damage that could not be attributed to the product itself.** Once met these situations above, you should seek solutions from the related responsible parties and Godox assumes no responsibility. The damage caused by parts, accessories and software that beyond the warranty period or scope is not included in our maintenance scope. The normal discoloration, abrasion and consumption are not the breakage within the maintenance scope.

## Maintenance and Service Support Information

The warranty period and service types of products are implemented according to the following Product Maintenance Information:

Parts	Maintenance Period (month)	Warranty Service Type
Internal circuit board	12	Customer sends the product to designated site
Other items (optical accessories, cables, package, etc)	No	Without warranty

Godox After-sale Service Call **0755-29609320-8062**



Wechat  
Official Account  
神牛微信公众号

制造商：深圳市神牛摄影器材有限公司

地址：深圳市宝安区福海街道塘尾社区耀川工业区厂房2栋

电话：+86-755-29609320 (8062) 传真：+86-755-25723423

邮箱：godox@godox.com 网址：godox.com

MANUFACTURER: GODOX Photo Equipment Co., Ltd.

Add.: Building 2, Yaochuan Industrial Zone, Tangwei Community, Fuhai Street,  
Bao'an District, Shenzhen 518103, China Tel: +86-755-29609320 (8062)

Fax: +86-755-25723423 E-mail: godox@godox.com Website: godox.com



Copyright © 2026 Godox All Rights Reserved.

中国制造 Made in China | 705-ML10B0-00