




GM6S

4K HDMI 5.5" Ultra Bright Camera Monitor


GM6S is a 1200nit-bright camera monitor that unlocks more possibilities for outdoor shooting. High bright, portable, with the additional Type-C power supply and plenty of auxiliary features, GM6S is undoubtedly the best outdoor partner with which you can never go wrong.

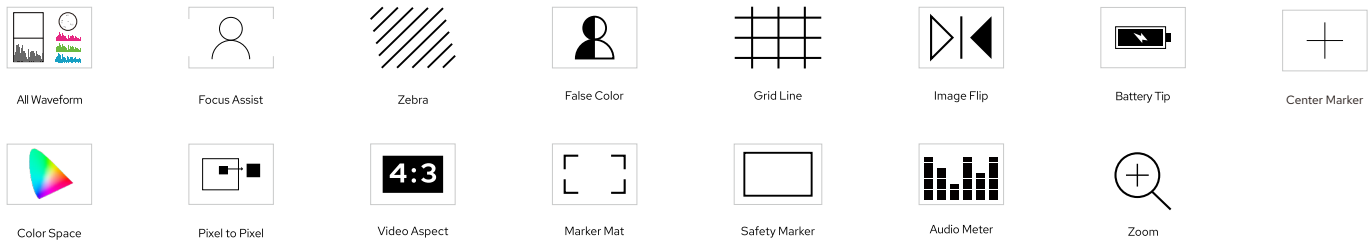

What's in the Box



Optional Purchase

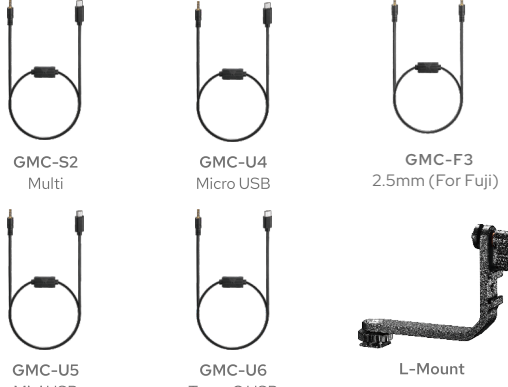

Tech Specs


Model	GM6S
Screen	5.5" IPS HD ultra-bright touch screen
Screen Ratio	16:09
Resolution	1920x1080
Contrast Ratio	1000:1
Color Depth	8bit
Visual Angle	160°H/160°V
Brightness	1200nits±10%
Power	9W
Power Supply	DC Input: 7-24V, Ø5.5mm×21 plug, DC Output: 7.8x0.3V/1.5A, Ø5.5mm×21 plug Type-C power supply above 18W, Lithium Battery: F550/F750/F970 lithium battery, 7.2V
Material	Plastic frame & metal shell
Video Format	480i/576p/50/60Hz, 480p/576p/50/60Hz, 1080i/1080p/50/60Hz, 1280i/1280p/50/60Hz, 1920i/1920p/50/60Hz, 1920x1080p/23.98/24/25/29.97/30/50/59/59.94/60Hz, 3840x2160p/23.98/24/25/29.97/30Hz, 4096x2160p/23.98/24/25/29.97/30Hz
Audio Output	3.5mm Earphone dual-channel output
SD Card Slot	Support importing cube files and firmware upgrade by SD card Support 17/32/33/64/165 cube
Working Temperature	-10°C~50°C
Dimension	14.5×8.7×2.8cm
Net Weight	273g

GM7S

4K HDMI 7" Ultra Bright Camera Monitor

GM7S combines a large screen with a peak brightness of 1200nit, allowing you to check the screen effortlessly to ensure perfect images. What's more, with REC709 color calibration, fanless design, multiple options for power supply and a wealth of professional tools, the GM7S is an optimal solution for vloggers, YouTubers, filmmakers and more.

Optional Purchase

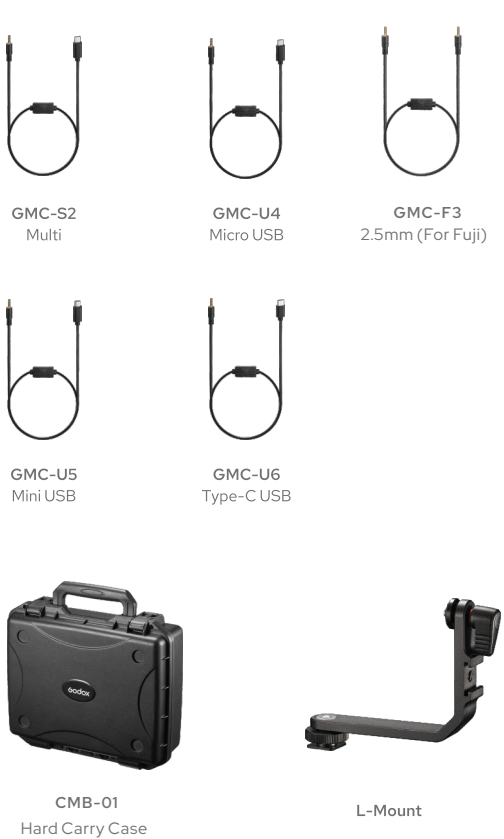

What's in the Box



Tech Specs

Model	GM7S
Screen	7" IPS HD ultra-bright touch screen
Screen Ratio	16:10
Resolution	1920x1200
Contrast Ratio	1000:1
Color Depth	8bit
Visual Angle	160°H/160°V
Brightness	1200nit±10%
Power	10W
Power Supply	DC Input: 7~24V, Ø5.5mm×21 plug DC Output: 7.8x0.3V/1.5A, Ø5.5mm×21 plug Type-C power supply above 18W Lithium Battery: F550/F750/F970 lithium battery, 7.2V
Material	7.2V Plastic frame & metal shell
Video Format	480i/576p/50/60Hz 480p/576p/50/60Hz 1280x720p/50/60Hz 1920x1080p/50/60Hz 1920x1080p/23.98/24/25/29.97/30/50/59/59.94/60Hz 3840x2160p/23.98/24/25/29.97/30Hz 4096x2160p/23.98/24/25/29.97/30Hz
Audio Output	3.5mm Earphone dual-channel output
SD Card Slot	by SD card Support 17/32/33/64/165 cube
Working Temperature	-10~50°C
Dimension	18x12x3.1cm
Net Weight	507g



GM55

4K HDMI 5.5" Touchscreen On-Camera Monitor

GM55 is a 5.5" 4K HDMI touchscreen on-camera monitor with numerous advanced features. With professional software tools such as false color, histogram, zebra, focus assist and safety marker, it enables you to preview the footage and check exposure, focus and framing. It is a good solution for shooting.



Key Features


- 5.5" with 4K HDMI output
- IPS touch screen improves shooting efficiency
- Natural color display under REC709 color standard
- Expansive 160°/160° viewing angle ensures consistent, accurate colors when being watched from different angles
- A dummy battery that can power the camera to greatly extend the runtime
- Capable of camera control on the screen of by the shortcut buttons
- Multiple auxiliary tools such as focus assist and false color

What's in the Box




Monitor ×1 Hood ×1 Dustless Cloth ×1 Cold Shoe Bracket ×1
Standard HDMI to Micro Cable(80cm) ×1 Standard HDMI to Mini Cable(80cm) ×1
Instruction Manual ×1

Optional Purchase

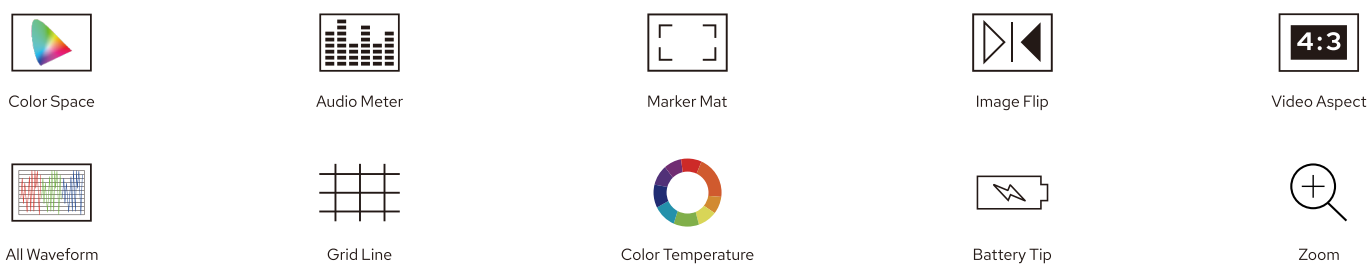

Tech Specs

Model	GM55
Screen	5.5" IPS Touch Screen
Screen Ratio	16:9
Resolution	1920x1080
Power	< 7W
Material	PC Plastic
Contrast Ratio	1000:1
Color Depth	8bit
Dimness	420nits±10%
Visual Angle	160°H/160°V
Video Format	480i/480p/60Hz, 576p/50/59.94/60Hz, 1280i/1280p/50/60Hz, 1920i/1920p/50/60Hz, 1920x1080p/23.98/24/25/29.97/30/50/59.94/60Hz, 3840x2160p/23.98/24/25/29.97/30Hz, 4096x2160p/23.98/24Hz
Audio Output	3.5mm Earphone dual-channel output
SD Card Slot	Support to read in cube files by SD card, Support 17/32/33/64/165 cube
Power Source	Input: DC 7-24V; Output: the max. output of dummy battery is DC 8V/1.5A
Battery	Compatible with F550/F750/F970 lithium battery
Working Temperature	-10°C~50°C
Dimension	154×90.4×34.3mm(with hood)
Net Weight	318g(with hood)

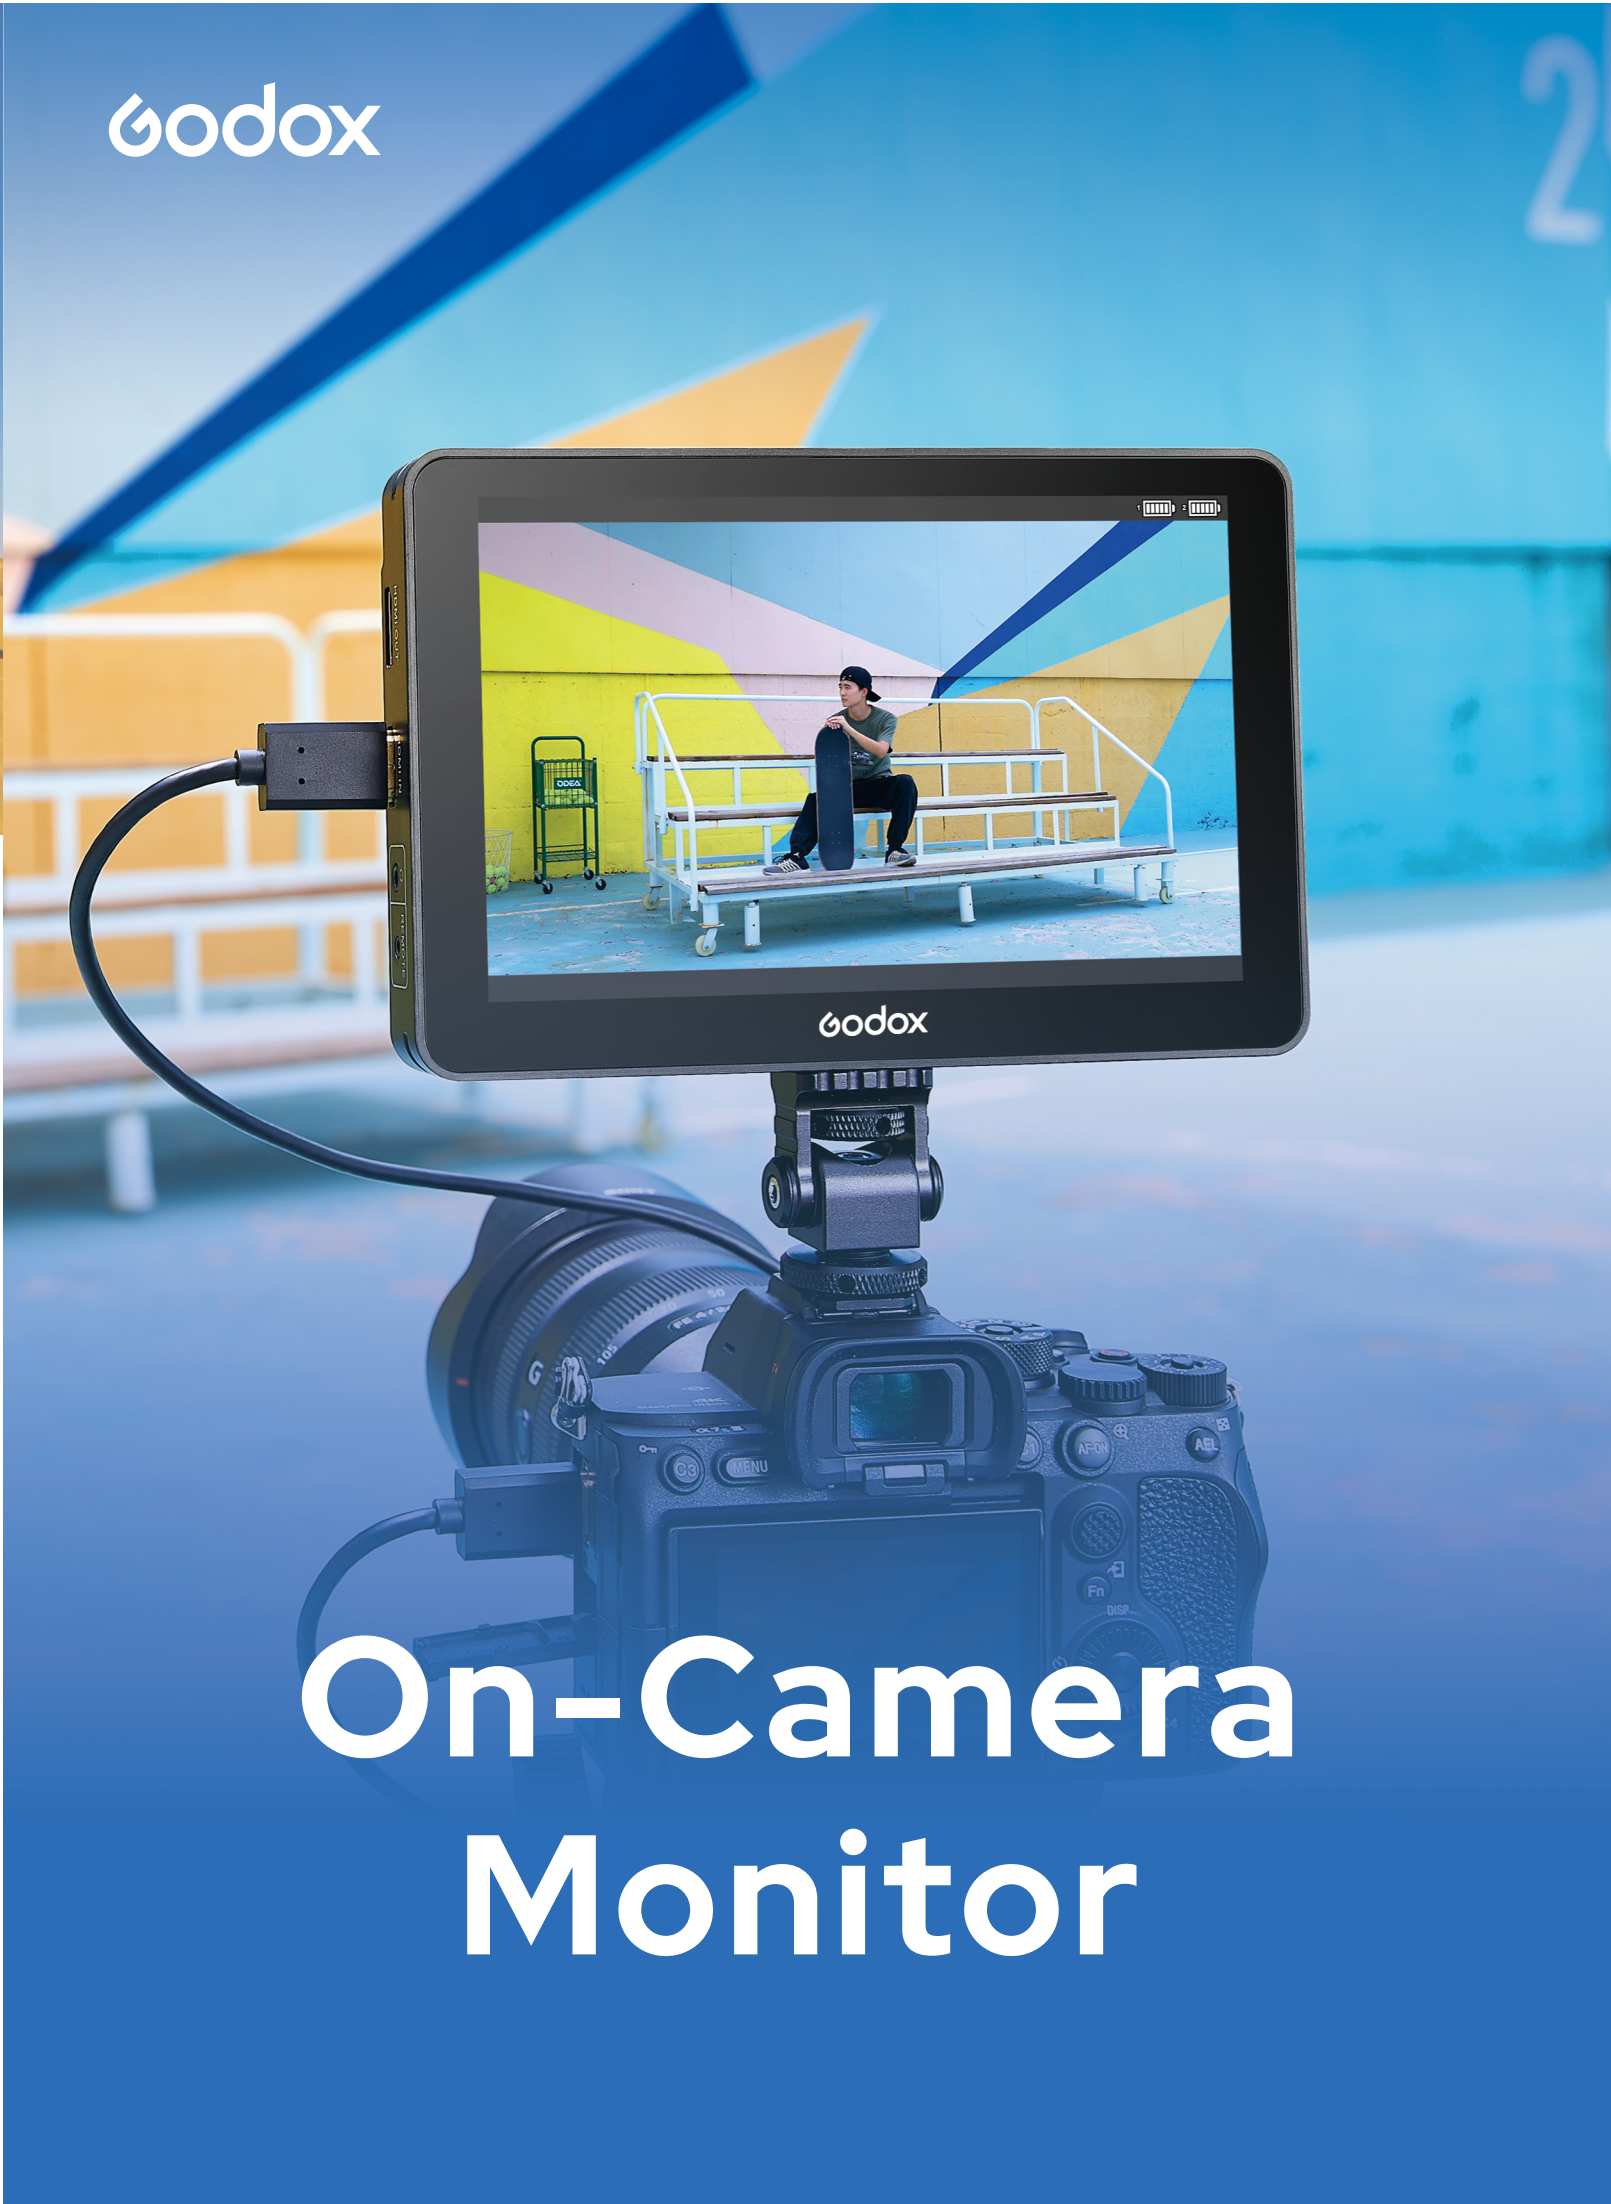

On-Camera Monitor

GODOX Photo Equipment Co., Ltd

Factory Add: 4th Floor of Building 1, 1st to 4th Floor of Building 2, 4th Floor of Building 3, 1st to 4th Floor of Building 4, Yachuan Industrial Zone, Tangqian Community, Fuhang Street, Bao'an District, Shenzhen 518013, China
TEL: +86-(0)755-2570897/25726373 FAX: +86-(0)755-25723423 Email: godox@godox.com